



INDUSTRIAL PROTEX LIGHT

ABOUT THE PROTEX

ATEX APPROVED FOR FLAMMABLE ENVIRONMENTS

The Protex Flameproof Light fixture from Vision X provides you with a powerful and energy efficient alternative to traditional hazardous lights. The Protex offers a compact design making it the perfect replacement for older fixtures that are too bulky or require high maintenance. The Protex is designed to be mounted on the interior or exterior for area illumination.

This fixture features 18 High Output 3-Watt LEDs for a total of forty watts, and has an integrated 85-264V AC input range. The Die-Cast Aluminum Housing combined with a soda-lime glass lens allow the light to operate in any environment.

FOR USE WITH

- FUEL DELIVERY SYSTEMS
- FRACKING DRILL RIGS
- OIL PLATFORMS
- OIL REFINERIES
- TANK FARMS

ATEX 95 APPROVAL



DIRECTIVE 94/9/EC

The Vision X Protex fixture has undergone extensive product testing and has earned the ATEX 95 certification to become a flameproof electrical equipment.

FLAME/EXPLOSION CERTIFICATIONS



CE 0575 EX II 2G Ex d II B T5 Gb
 Zone 1 – Gases, Mists, Vapors. Occasional, Present
 Zone 2 – Gases, Mists, Vapors. Only present for a short period
 EX d – Prevents transmission of the explosion outside
 II B – For Complete list of explosion group examples see ATEX 94/9/EC



PROTEX FLAMEPROOF LIGHT



ITEM #: MIL-EXP1860 Shown
 PART #: 9895956

18-WATT FLAMEPROOF ATEX 95 CERTIFIED LED FIXTURE
 Soda-Lime Glass (15.0t) Lens | Integrated 85-264V AC Power Input | Single Stud Mounting System

BEAM PATTERNS 10°, 25°, 60°	WARRANTY Extended	DIMENSIONS 11.38" x 6.88" x 8.46"
RAW LUMENS 3,500 lm (ea)	EFFECTIVE LUMENS 2,450 lm (ea)	METRIC 289mm x 174.8mm x 215mm
WATTAGE / AMPS 40W / 8.43A @12V	VIBRATION RATING 15.6 G rms	WEIGHT 21.16 lb / 9.16 kg




ITEM #	PART #	QTY	BEAM
MIL-EXP1810	9895925	1	10°

ITEM #	PART #	QTY	BEAM
MIL-EXP1860	9895956	1	60°

BEAM PATTERN

MIL-EXP1860 | 9895956 - 60° Beam

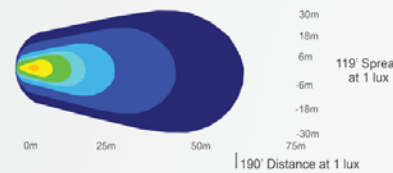

2D VIEW

